
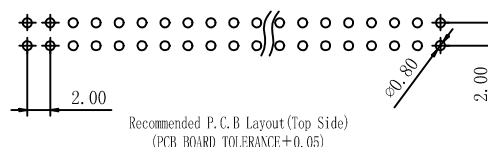


HSF

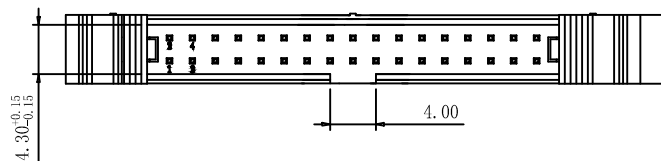

SPECIFICATION

Current Rating: 1.5Amp
 Insulation Resistance: 1000MΩ min
 Contact Resistance: 20MΩ max
 Withstand Voltage: 500V AC/DC
 Operating Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF UL 94V-0

Ordering Code:

LHCS01 - X - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No. of Contacts
 8 10 14 16
 20 24 26 30
 34 40 44 50
 60 64 68

③ Contact Plating:

G0:Gold flash S0:Selective
 G1:3U" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin

④ Color Insulator

B:Black
 U:Blue
 G:Gray




⑤ Insulator Material

A; PBT
 B:PA6T
 C:LCP
 D:PA46
 E:PA9T

⑥ Packing

A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP

⑦ A:Short Latch
 B:Long Latch

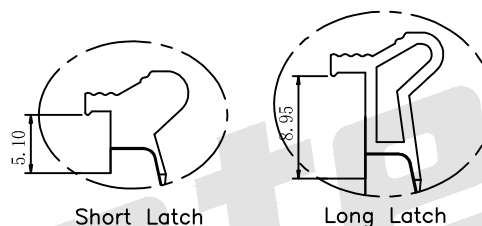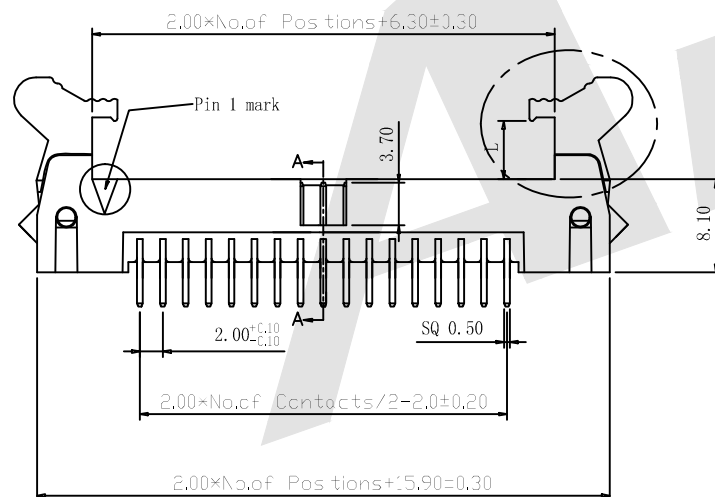

SECTION A-A

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW YG ZHONG DATE 01/05/2016
 CHECK BobYang DATE 01/05/2016



Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:

2.00mm Ejector Header 180°

DRAWING NO: LHCS01-XXXXXX

PRODUCT NO: LHCS01-XXXXXX

REV

DESCRIPTION

DATE